



PURE(MONO)


THE MINIMALIST DESIGN MAKES THE LIGHTING
MORE COMFORTABLE AND HEALTHY.

Powered by



Intelligence
Inside

PURE-MONO

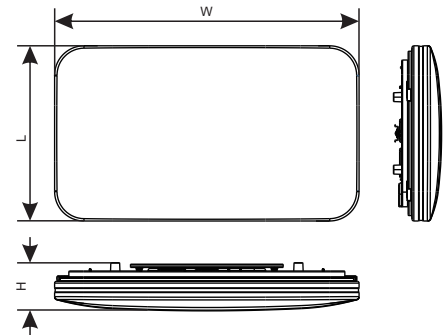


Parameters

Model	Power	LED Qty	Luminous Flux	Efficacy	Size
SY5252-L60W	60W	2835SMD/9V-1W/72LEDS	5364LM	91.4Lm/W	520*520*82mm
SY4848-L50W	50W	2835SMD/9V-1W/84LEDS	4000LM	80Lm/W	480*480*72mm
SY5230-L30W	36W	2835SMD/9V-1W/36LEDS	2400LM	80Lm/W	520*300*82mm
SY5219-L25W	30W	2835SMD/9V-1W/30LEDS	1906LM	78.4Lm/W	520*190*82mm
SY6838-L60W	60W	2835SMD/9V-1W/72LEDS	4993LM	84.6Lm/W	680*380*82mm
SY9019-L50W	50W	2835SMD/9V-1W/60LEDS	4091LM	82.4Lm/W	900*190*82mm
SY1200-L60W	50W	2835SMD/9V-1W/84LEDS	4000LM	80Lm/W	1200*160*80mm


Input Voltage: AC180-240V
 Frequency: 50/60Hz
 Power Factors: ≥ 0.9
 Efficiency: 90%
 CCT: 6000 ~ 6500K
 CRI: Ra ≥ 80
 Beam Angle: 120°
 Frame Material: Aluminum 6063
 Base Material: Iron Q235
 Lampshade: PS
 Body Color: White
 Input Cable: 0.5mm²
 Installation: Mount
 Protection: IP20
 Environment: -20°C ~ 40°C
 Longevity: 20,000h

Packing

Model	Weight/PC	Qty/CTN	Inner Box Size	Master CTN
SY5252-L60W	2.8kg	3pcs	59*56*10cm	61*58*32cm
SY4848-L50W	1.5kg	5pcs	52*49*9cm	53*50*46cm
SY5230-L30W	1.6kg	6pcs	59*34*10cm	70*61*32cm
SY5219-L25W	1.2kg	6pcs	59*23*10cm	61*48*32cm
SY6838-L60W	2.7kg	3pcs	72*42*10cm	76*44*32cm
SY9019-L50W	2.0kg	3pcs	77*23*10cm	99*25*32cm
SY1200-L60W	1.8kg	3pcs	127X20X11cm	128X34X22cm




DETAILS



Optical diffuser lens, anti-glare



Clamp structure for Lampshade

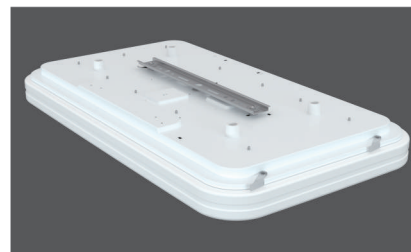

Quick Installation Mount



PURE(DUAL)


BEST WISHES TO ALL COUPLES.

Powered by



Intelligence
Inside

PURE-DUAL

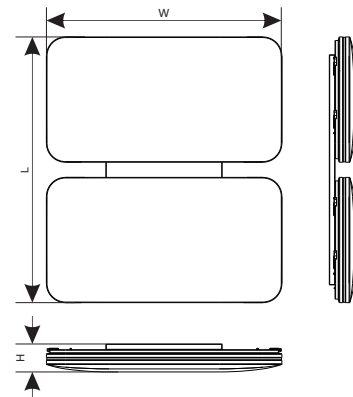

Parameters



Model	Power	LED Qty	Luminous Flux	Efficacy	Size
SY6233-L120W	120W	2835SMD/9V-1W/168LEDS	9600LM	80Lm/W	700*620*72mm

Input Voltage: AC180-240V
 Frequency: 50/60Hz
 Power Factors: ≥ 0.9
 Efficiency: 90%
 CCT: 6000 ~ 6500K
 CRI: Ra ≥ 80
 Beam Angle: 120°
 Frame Material: Aluminum 6063
 Base Material: Iron Q235
 Lampshade: PS
 Body Color: White
 Input Cable: 0.5mm²
 Installation: Mount
 Protection: IP20
 Environment: -20°C ~ 40°C
 Longevity: 20,000h

Packing

Model	Weight/PC	Qty/CTN	Inner Box Size	Master CTN
SY6233-L120W	4.5kgs	1	-	74*66*9cm


DETAILS

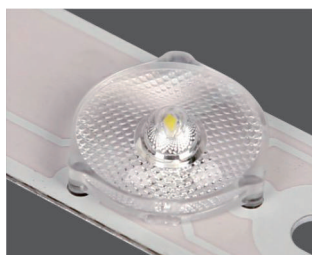

Optical diffuse lens, anti-glare



Clamp structure for Lampshade

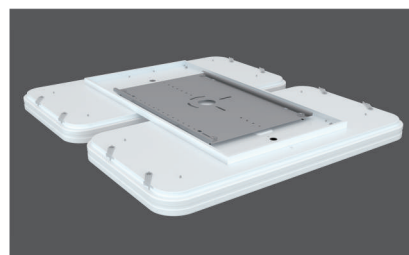

Quick Installation Mount




PURE (TRIPLE)

STABLE, MATURE AND HANDSOME.



PURE-TRIPLE

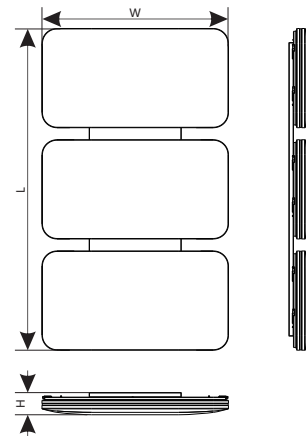

Parameters



Model	Power	LED Qty	Luminous Flux	Efficacy	Size
SY6233-L180W	180W	2835SMD/9V-1W/252LEDS	14400LM	80Lm/W	1070*620*72mm

Input Voltage: AC180-240V
 Frequency: 50/60Hz
 Power Factors: ≥ 0.9
 Efficiency: 90%
 CCT: 6000 ~ 6500K
 CRI: Ra ≥ 80
 Beam Angle: 120°
 Frame Material: Aluminum 6063
 Base Material: Iron Q235
 Lampshade: PS
 Body Color: White
 Input Cable: 0.5mm²
 Installation: Mount
 Protection: IP20
 Environment: -20°C ~ 40°C
 Longevity: 20,000h

Packing

Model	Weight/PC	Qty/CTN	Inner Box Size	Master CTN
SY6233-L180W	7kgs	1	-	111*66*9cm


DETAILS



Optical diffuse lens, anti-glare



Clamp structure for Lampshade

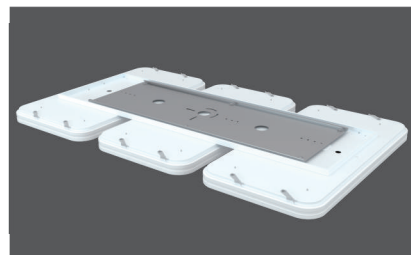

Quick Installation Mount